


CHANNEL

Profile	A	B	t	kg/m	Perimeter	CCD
VCH16008	101.60	50.80	6.35	3.277	390.953	114
VCH16010	104.00	42.00	2.00	0.993	370.283	112
VCH16021	12.00	12.00	1.50	0.134	67.970	17
VCH16018	15.88	15.88	1.68	0.201	90.627	23
VCH16011	32.05	25.56	2.60	0.549	158.890	41
VCH16017	38.10	38.10	3.18	0.930	220.867	54
VCH16001	46.00	30.00	3.00	0.812	204.283	55
V40064	46	30	3	0.774	197.628	100
VCH16015	47.50	19.00	1.50	0.335	166.970	51
V40129	50.00	25.00	1.50	0.394	195.970	56
VCH16013	50.00	25.00	1.50	0.394	195.970	56
VCH16014	50.00	25.00	2.00	0.520	194.970	56
VCH16005	50.80	23.82	1.60	0.529	245.202	56
VCH16002	54.50	30.00	2.00	0.598	223.283	62
VCH16009	68.00	40.00	2.50	1.036	310.287	75
VCH16003	76.00	38.00	3.00	1.186	295.802	85
VCH16006	76.20	38.10	7.92	2.742	283.891	85
VCH16007	78.60	28.00	1.30	0.463	265.793	83
VCH16004	80.00	35.00	2.00	0.788	294.283	87
V40044	40.00	40.00	40.00	0.926	232.627	87

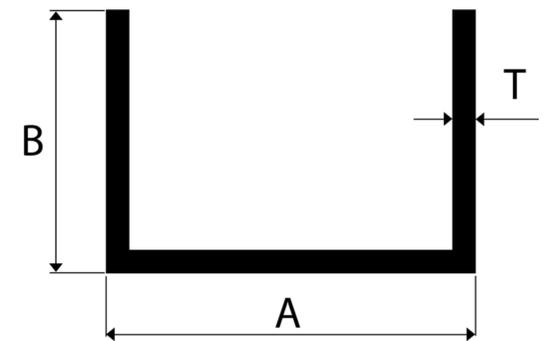

All the dimensions are in millimeters All the profiles are manufactured as per BS EN 755 unless specified